

 Website

[www.SeeDevil.com](http://www.SeeDevil.com)

 Toll Free Number

877-659-5476

 Email

[info@SeeDevil.com](mailto:info@SeeDevil.com)

SD-LBF-100-2TS-W-G1  
Owner's Manual


© 2018 by Rezek Engineering  
1<sup>st</sup> Edition, August 2018

Any reprinting or unauthorized use without the  
written permission of Rezek Engineering is expressly prohibited.

Printed in U.S.A.

Part Number: SD-OM-AUG18-G1

**LED  
BALLOON  
LIGHT**  
100 WATT

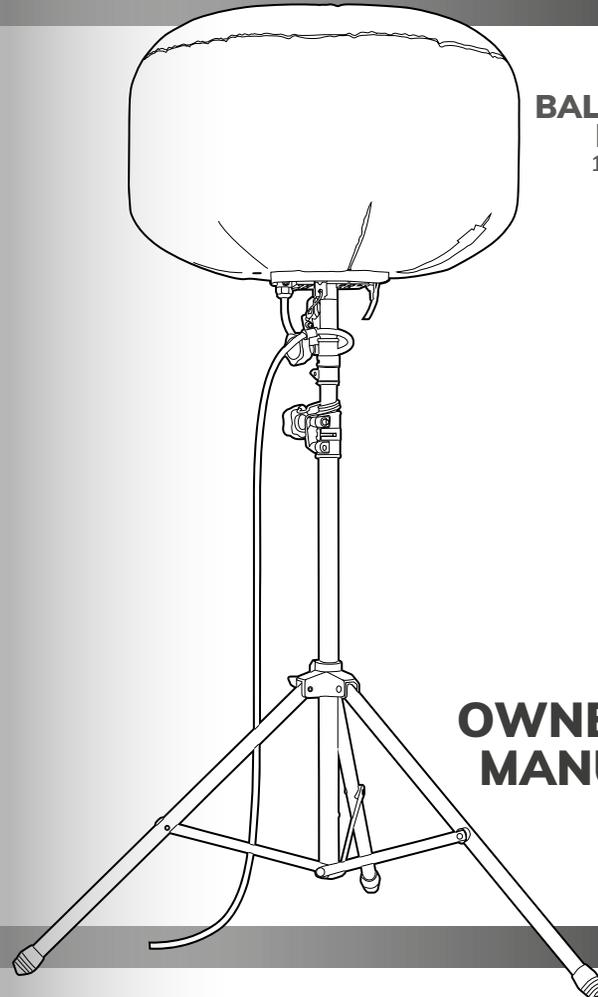

**OWNER'S  
MANUAL**




## WARNING

This product may contain chemicals known to the state of California to cause cancer, birth defects, or other reproductive harm.

Read this manual carefully before operating this machine. The SeeDevil Owner's Manual should stay with the machine if it is sold.

**DO NOT THROW AWAY USER MANUAL.**

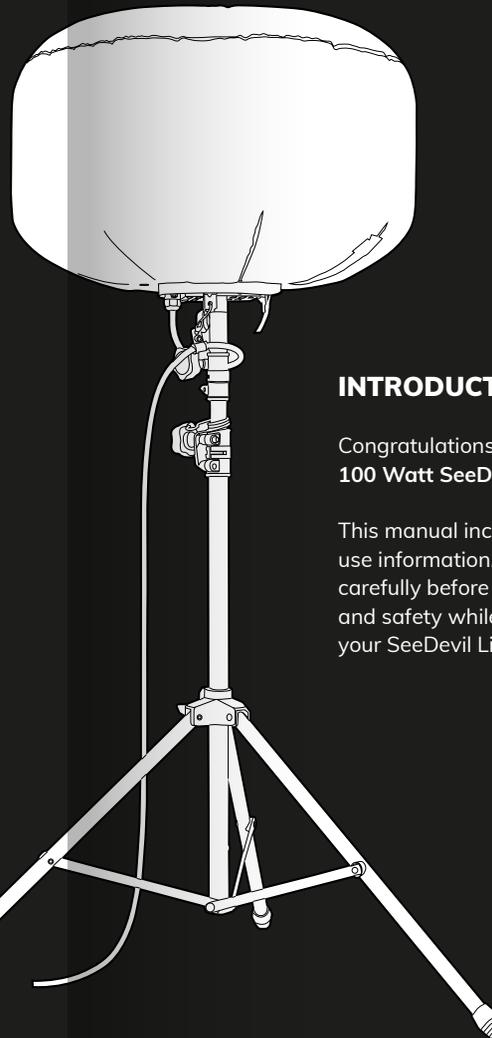

## INTRODUCTION

Congratulations on your purchase of your **100 Watt SeeDevil LED Light Balloon.**

This manual includes assembly and product use information. Please read the manual carefully before using to ensure proper use and safety while operating and transporting your SeeDevil Light Balloon.

SD-LBF-100-2TS-W-G1  
Owner's Manual

© 2018 by Rezek Engineering  
1<sup>st</sup> Edition, August 2018

Any reprinting or unauthorized use without the written permission of Rezek Engineering is expressly prohibited.

Printed in U.S.A.

Part Number: SD-OM-AUG18-G1

## IMPORTANT MANUAL INFORMATION



This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible injury or death. This symbol is also used to indicate a hazardous situation which, if not avoided, could result in serious injury or death.

**⚠ WARNING:** USING THIS PRODUCT FOR ANY OTHER PURPOSE OR IN ANY OTHER WAY THAN EXPLAINED IN THE OWNER'S MANUAL COULD LEAD TO DEATH OR SERIOUS INJURY.

**⚠ WARNING:** KEEP OUT OF REACH OF CHILDREN.

**⚠ WARNING:** CHILDREN CAN SUFFOCATE BY PLAYING INSIDE UNINFLATED BALLOON COVER. TO AVOID RISK PLEASE KEEP BALLOON COVER AWAY FROM CHILDREN & BABIES.

**⚠ WARNING:** PLEASE READ AND UNDERSTAND MANUAL COMPLETELY BEFORE OPERATING THE MACHINE.

For replacement parts, service and additional accessories, please contact [www.SeeDevil.com](http://www.SeeDevil.com).

SeeDevil is constantly improving products and reserves the right to make product changes at any time without notice and with no obligation to any products designed or manufactured at any time. This manual contains the most current product information available at the time of printing, there may be minor discrepancies between your product and this manual. If there is any question or concern please contact a SeeDevil dealer.

This manual should be considered a permanent part of this SeeDevil Light Balloon and should remain with this product when resold.

\*Product specifications are subject to change without notice.

## TABLE OF CONTENTS

1. Safety Information .....	4
1.1 Falling or tipping over .....	4
1.2 Electrical shock .....	4
1.3 Operation in weather conditions .....	5
1.4 Fire/Explosion .....	5
1.5 High temperature .....	5
1.6 Modification to unit .....	5
2. Product Description .....	6
3. Control Function .....	8
4. Preparation & Operation .....	9
4.1 Tripod preparation & operation .....	10
4.2 LED unit & light cover preparation .....	12
5. Maintenance, Storage & Transport .....	14
6. Consumer Information .....	16
7. Warranty Information .....	18
8. Warranty Statement .....	20

## 1. SAFETY INFORMATION

### **! 1.1 WARNING: FALLING OR TIPPING OVER**

- Set up and place the tripod on a flat level surface. Ensure that all legs of the tripod are completely extended and the screw knob on the bracket connecting the legs and the tripod center at the base is firmly tightened. . Do not use on unlevel surface.
- Never transport or move a fully assembled SeeDevil LED Balloon Light. Never move while LED unit is on the tripod or while the tripod unit is extended. If the unit must be moved or transported, turn off power, remove the LED unit and then close the tripod as indicated by the instructions in the owner's manual.
- Make sure the LED unit is properly fastened to the tripod before use. Firmly tighten the screw knobs before use.
- Before extending or retracting the telescoping function on the tripod, be sure that the two knobs are loosened. For retraction firmly grip and brace the led unit to avoid sudden retraction. Failure to do which may result in damage to the product or serious injury.
- Do not operate this unit in conditions with wind gusts at or over 15 MPH.
- After extending the tripod, firmly tighten the screw knob. Failure to firmly tighten screw knobs could result in sudden retraction of the tripod, resulting in serious injury or death.

### **! 1.2 WARNING: ELECTRICAL SHOCK**

- DO NOT operate this unit in areas exposed to water. Turn power OFF and unplug before handling the unit. Failure to do so may result in electrical shock, serious injury or death.
- DO NOT operate when in rain or snow.

NEVER touch the machine with wet hands or electrical shock may occur.

- Connect the ground lead of the machine to the ground terminal of the power source.
- Extension cords should be protected by a tough flexible rubber sheath (IEC245) or the equivalent to withstand mechanical stresses.

### **! 1.3 OPERATION IN WEATHER CONDITIONS**

- DO NOT OPERATE IN RAIN, SNOW OR WIND AT OR OVER 15 MPH
- DO NOT OPERATE IN POOR WEATHER CONDITIONS

### **! 1.4 CAUTION: FIRE/EXPLOSION**

- Please use in a ventilated area.



### **! 1.5 CAUTION: HIGH TEMPERATURE**

- DO NOT touch LED unit when product is turned on. This may result in burns or other serious injury. Always wait at least 10 minutes to handle after turning power to the unit off.

### **! 1.6 CAUTION: MODIFICATION TO UNIT**

- DO NOT modify or remove any parts from the unit. Modifications and removal of parts may lead to serious harm or death. All parts are designed for intended use of this product. Any modification or removal of parts violates all warranties and agreements, and may lead to serious harm or death.

## 2. PRODUCT DESCRIPTION

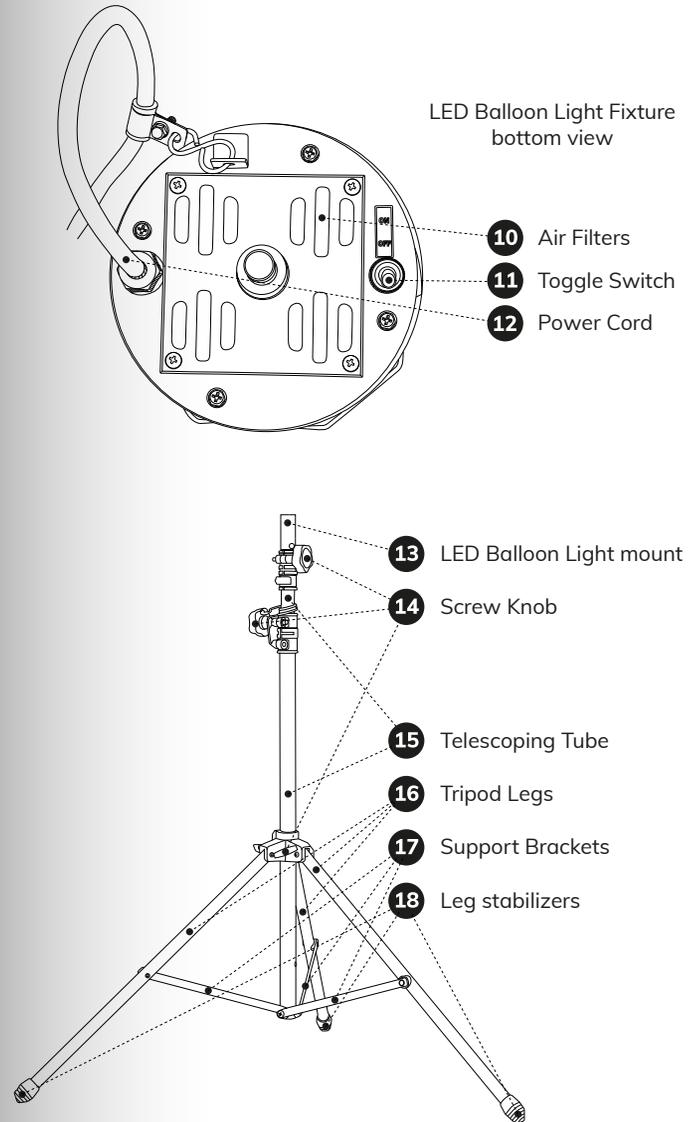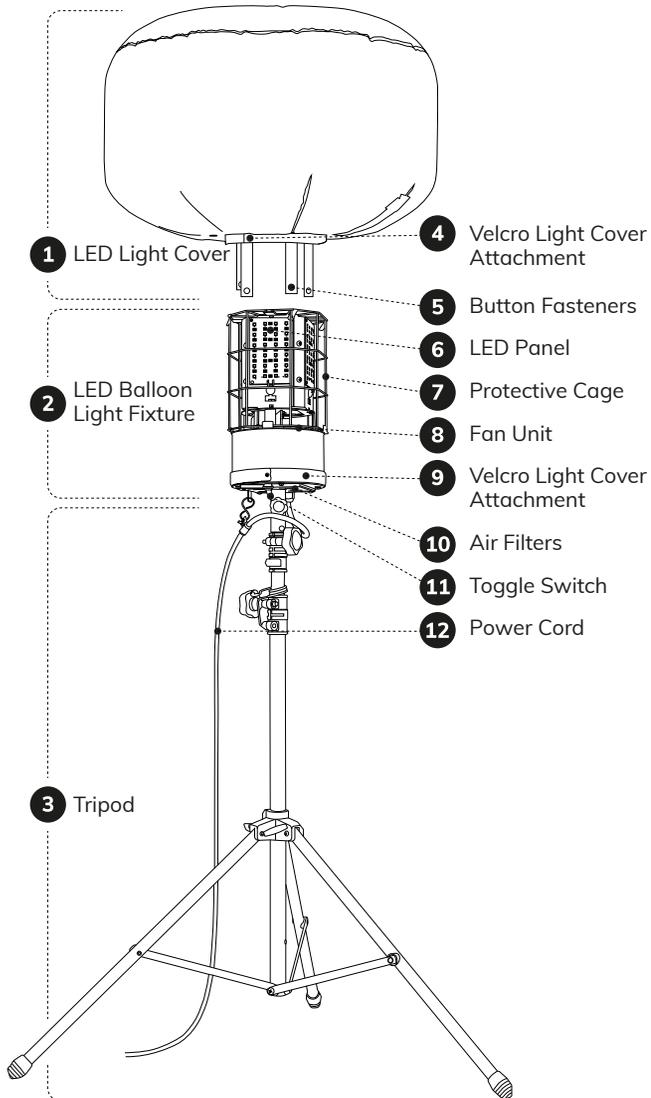



**19** LED Balloon Light Fixture Carrying Case



**20** Tripod carrying case

### 3. CONTROL FUNCTION


The SeeDevil 100 Watt LED Balloon Light control function is simple. Plug it in and flip the ON/OFF Toggle Switch to ON.

SeeDevil products come with a versatile molded plug with a folding ground prong as well as a ground clamp. Whenever available use the power cord plug utilizing the ground prong. If the power source receptacle does not have a ground terminal, use the green ground clamp and fasten to the power source's ground terminal.

### 4. PREPARATION & OPERATION



## 4.1 TRIPOD PREPARATION AND OPERATION

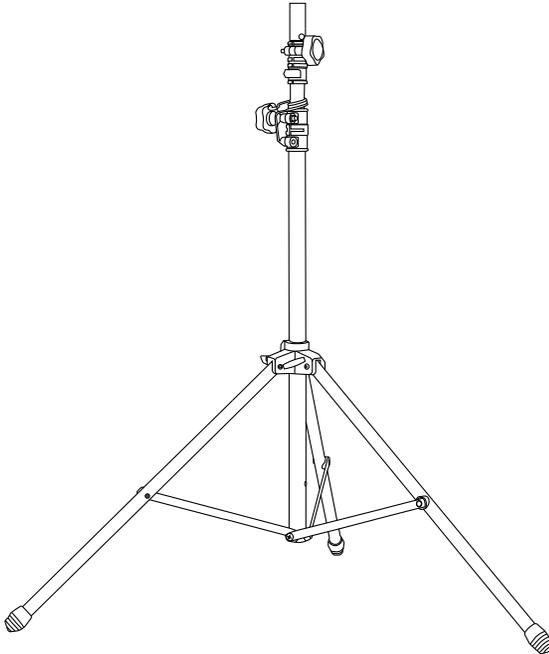


- Select a level surface to set up the tripod. Allow for a minimum of 3x3 feet for the tripod setup location.
- Remove tripod from carrying case.
- Carefully stand the tripod upright, with the three legs pointing down and the LED Balloon Light mount on the top.
- Loosen the screw knob at the base then pull the legs apart spreading the 3 legs, while sliding the support bracket down until it stops. Make sure legs are fully extended.

- Tighten the bottom most screw knob securing tripod legs.
- Return to the top of the portion of the tripod. Loosen the (2) screw knobs.
- Mount the LED Balloon Light fixture on the tripod's LED Balloon Light mount and firmly tighten the screw knob fastening the LED Balloon Light fixture to the LED Balloon Light mount.
- Using your hands slide one tripod extension poles up and firmly tighten the screw knob. After one extension pole has been extended and secured by the screw knob follow the same procedure for the second extension pole to reach desired height. **DO NOT** extend further than the red line, surpassing the red line creates an unstable tripod which may result in serious injury or death.  
**Caution:** Pinch point may occur, be careful to not pinch or injury hands. If you are unsure or unable to operate this equipment **DO NOT** operate. Please consult an expert.
- **To retract the tripod first firmly grip the extension pole of which you are retracting. Loosen one black screw knob, then using your hands slide the extension pole down into the tripod assembly. Repeat once more for the second extension pole if extended. Caution:** Pinch point may occur, be careful to not pinch or injury hands. If you are unsure or unable to operate this equipment **DO NOT** operate. Please consult an expert.
- Loosen screw knob on the bottom of the tripod. Close the tripod legs followed by tightening of the lower screw knob.
- Avoid pinching or injuring hands and fingers. Recheck and tighten all screw knobs to ensure secure travel.
- For tripod transportation: retract completely, close tripod legs, secure all screw knobs and place in the tripod carry bag.


## 4.2 LED UNIT AND LIGHT COVER PREPARATION

The illustrations below are based on the 300 W LED Balloon Light. The 100 W may differ slightly.

- Remove light cover from packaging.
- Unzip the zipper on the bag.
- Find the numbered button fasteners inside the light cover.

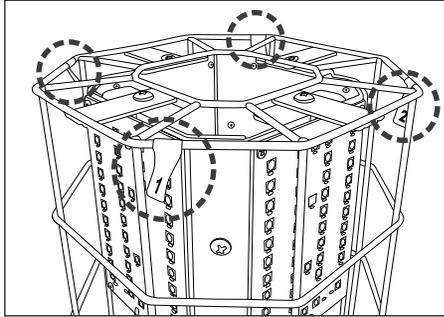


- Match the numbered button fasteners to the numbered tags on the LED unit and button the fasteners around the metal support cage to the corresponding number.

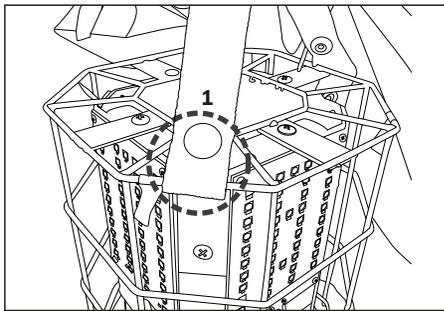


- Loosen the black screw knob on the bottom of the LED unit's mounting tube.


- Slide the LED unit into the tripod and securely tighten the black screw knob to safely mount the LED unit.
- Line up the metal circle in the Velcro of the light cover with the screw on the Velcro of the LED unit.

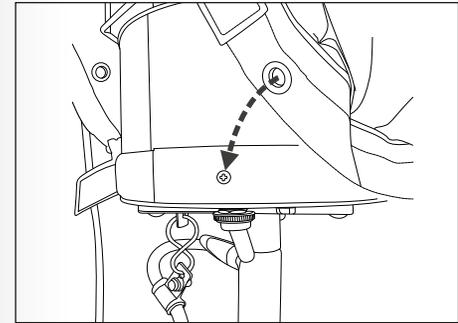

- Firmly and evenly fasten the Velcro around the unit.
- Zip the zipper closed.

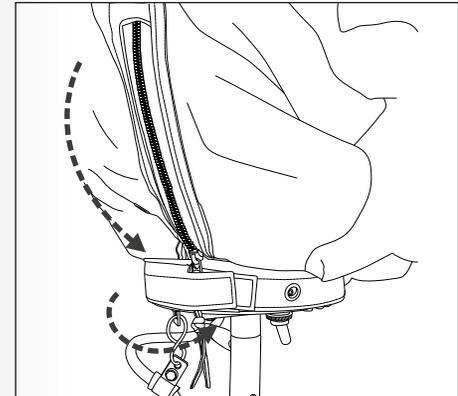

- Plug the electrical cord in to the power source.
- Use the ON/OFF switch to turn on the unit.

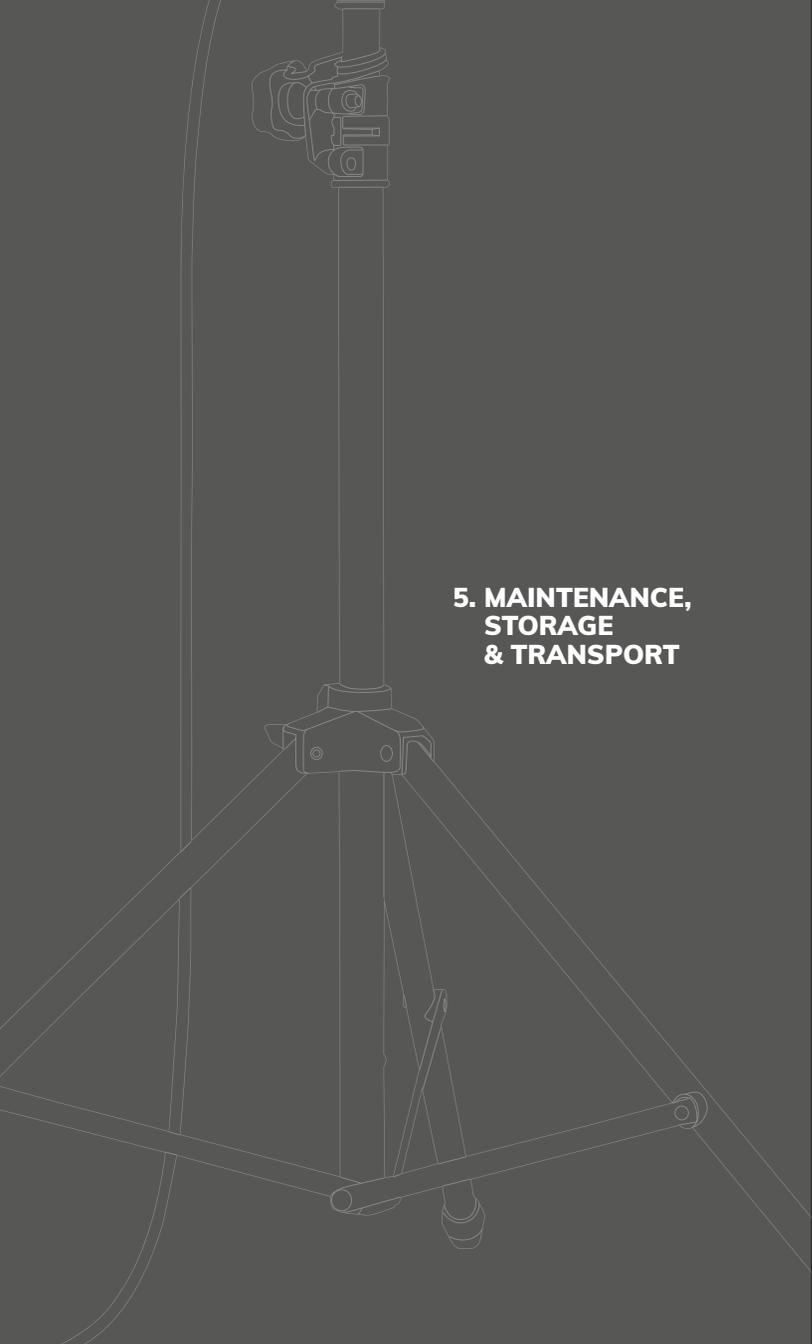


## 5. MAINTENANCE, STORAGE & TRANSPORT

### **MAINTENANCE**

- We recommend cleaning the unit after every use.
- Before performing maintenance make sure the unit is turned off and unplugged from any power source.
- Remove the Balloon Light cover. The Balloon Light cover may be clean with warm water and a light soap solution.
- To clean the air filter first remove the 4 screws on the air filter cover at the bottom of the LED unit. Second, remove the filter and use warm water to rinse the filter. Dry the filter then reinsert the filter and reinstall the 4 screws.
- To clean the LED unit hardware, use compressed air and gently blow out the interior and exterior of the unit.
- We recommend changing the air filter every 6-12 months. For more information visit [www.SeeDevil.com](http://www.SeeDevil.com).
- To maintain the tripod, simply wipe down with a cloth and warm water. A light soap solution may be used. Make sure to dry the unit after wetting.

### **STORAGE & TRANSPORT**

- After operation remove Balloon Light cover, fold and store in protected area.
- Always store the LED Unit and Tripod in their carry bags to ensure additional protection during transport and storage.
- Store the balloon light cover in a clean and dry place.
- If the products are used in weather elements, always clean and dry the products entirely before storage or transport.

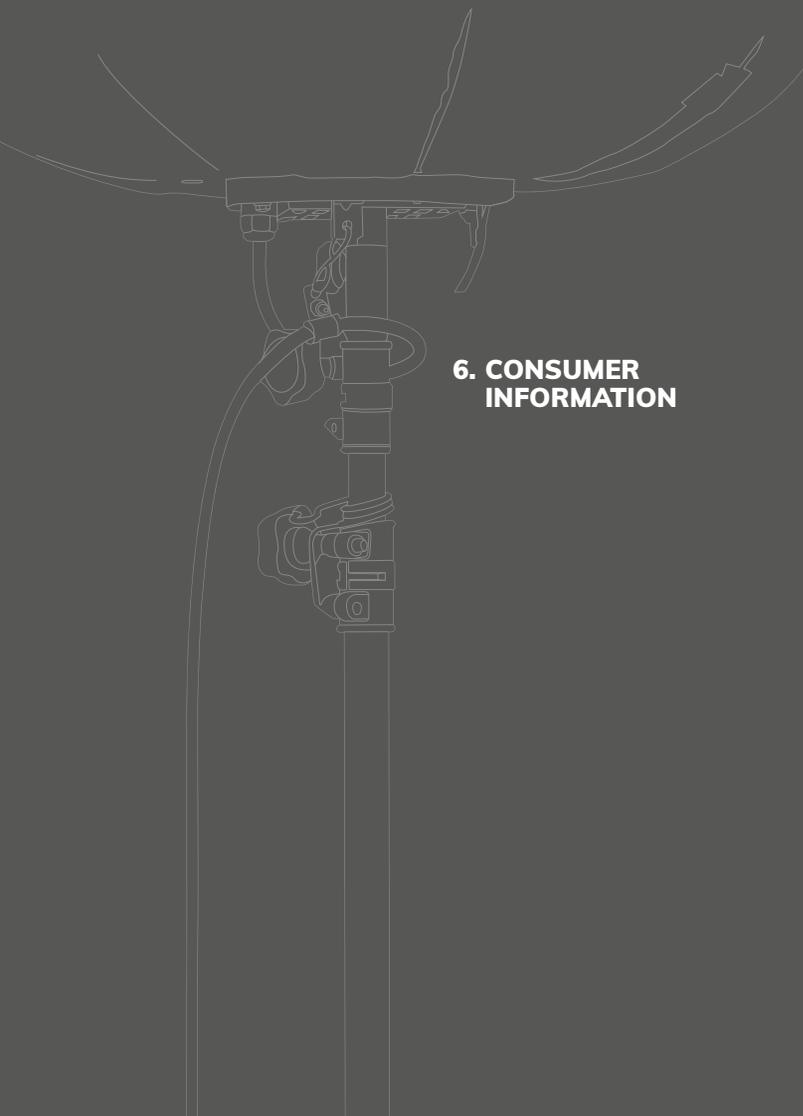

## 6. CONSUMER INFORMATION

### CONSUMER INFORMATION

- The Part Number and Serial Number can be found on the specifications sticker located on the side of the LED unit. These are your products identification numbers. Please keep record of these numbers as well as the purchase date.
- Keep these ID numbers in a separate place in case your product is stolen.
- Use the Part Number and Serial Number when ordering parts from a SeeDevil dealer.



## 7. WARRANTY INFORMATION

### WARRANTY INFORMATION

For detailed warranty information, please visit:  
[www.SeeDevil.com/warranty](http://www.SeeDevil.com/warranty)

<b>PRODUCT:</b>	SeeDevil Balloon Light
<b>PART NUMBER:</b>	
<b>SERIAL NUMBER:</b>	

Please hold onto your SeeDevil Balloon Light purchase invoice in order to claim your 2-Year limited warranty free from defects. For more information, visit:  
[www.SeeDevil.com/warranty](http://www.SeeDevil.com/warranty)

For general inquiries, please visit:  
[www.SeeDevil.com/contactus](http://www.SeeDevil.com/contactus)

Or call:  
**1-877-659-5476**



## BALLOON LIGHT SERIES 2-YEAR LIMITED WARRANTY

SeeDevil™ hereby warrants that new SeeDevil™ balloon lights purchased from authorized SeeDevil™ balloon light dealers in the United States will be free from defects in material and workmanship for the period of the time stated herein, subject to certain stated limitations.

**THE PERIOD OF WARRANTY** any new SeeDevil™ balloon light purchased from an authorized SeeDevil™ balloon light dealer in the United States will be warranted against defects in material and workmanship for a period of two (2) years from the date of purchase for pleasure or commercial use, subject to exclusions noted herein. SeeDevil™ balloon lights purchased for commercial use from an authorized SeeDevil™ balloon light dealer in the United States will be warranted against defects and materials or workmanship for a period of one (1) year from date of purchase subject to exclusions noted herein.

**DURING THE PERIOD OF WARRANTY** any authorized SeeDevil™ balloon light dealer will, free of charge, repair or replace, at SeeDevil's option, any part judged defective by SeeDevil™ due to faulty workmanship or material from the factory. Parts used in warranty repairs will be warranted for the balance of the product's warranty period. Failures other than those resulting from defects in material workmanship which arise solely as a result of owner abuse and/or lack of proper maintenance are not covered by this warranty. All parts replaced under warranty become the property of SeeDevil™.

**GENERAL EXCLUSIONS** from this one warranty shall include any failures caused by:

- a. Installation of parts or accessories that are not qualitatively equivalent to genuine SeeDevil™ parts.
- b. Abnormal strain, neglect, or abuse.
- c. Lack of proper maintenance.
- d. Accident or collision damage.
- e. Product modification.

**SPECIFIC EXCLUSION** from this warranty shall include parts replaced due to normal wear or routine maintenance.

**THE CUSTOMER'S RESPONSIBILITY** under this warranty shall be to:

1. Operate and maintain the balloon light as specified in the appropriate Owner's Manual.

2. Give notice to an authorized SeeDevil™ balloon light dealer of any and all apparent defects within ten (10) days after discovery, and make the machine available at the time for inspection and repairs at such dealer's place of business. You may locate your nearest authorized SeeDevil™ balloon light dealer online at [www.SeeDevil.com](http://www.SeeDevil.com).

**Two (2) years of private, non-commercial use  
One (1) year for commercial or rental applications**

Questions concerning this warranty? Contact SeeDevil™ at:  
SeeDevil™  
970 Reece St.  
San Bernardino, CA, 92411  
1-877-659-5476  
[info@SeeDevil.com](mailto:info@SeeDevil.com)

**WARRANTY TRANSFER:** to transfer any remaining warranty from the original purchaser to any subsequent purchaser, it is imperative that the unit be inspected and registered for warranty by an authorized SeeDevil™ balloon light dealer. In order for this warranty to remain in effect, this inspection and registration must take place within 10 days after transfer. A reasonable dealer imposed fee may be charged for the inspection.

**SeeDevil™ makes no other warranty of any kind, express or implied. Implied warranties of merchantability and fitness for a particular purpose which exceed the obligations and time limits stated in the warranty are hereby disclaimed by SeeDevil and excluded from this warranty.**

**Some states do not allow limitations on how long an implied warranty last, so the above limitations may not apply to you. Also excluded from this warranty are any incidental or consequential damages including loss of use. Some states do not allow that exclusion or limitation of incidental or consequential damages, so the above exclusion may not apply to you.**

**This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.**